


MRLX Phil 4.8 FZB

Krysspårskruv med liten skalle, Phillips

Stål 4.8, Typ H, BN 381

Cross recessed small pan head machine screws Phillips zincplated

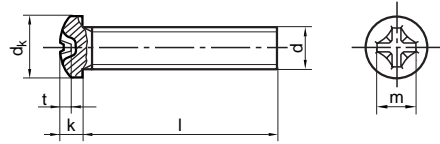

d	M1,6	M2	M2,5	M3	M4	M5	M6
dk max.	3	3,8	4,5	5,5	7	8,5	10
k max.	1,1	1,4	1,8	2	2,6	3,3	3,9
m~	1,7	2,3	2,7	3,5	4,1	4,8	6,2
t min.	0,7	0,9	1,2	0,86	1,45	2,14	2,25
Phil nr	0	1	1	2	2	2	3

LÄNGD

CA. PRIS KRONOR PER 100 ST

PGR 1313

04.04

2	106:—* ¹	126:—*					
3	118:—*	118:— ²	106:—*	64:—*			
4	118:—*	118:—	102:—	62:—	84:—*		
5	124:—*	118:—	102:—	62:—	116:—	156:—*	
6	130:—*	118:—	102:—	62:—	96:—	104:—	408:—*
8	130:—*	124:—	106:—	86:—	98:—	104:—	352:—
10		124:—	106:—	86:—	102:—	104:—	156:—
12		134:—	114:—	94:—	108:—	104:—	156:—
14		138:—	124:—	104:—	114:—	178:—	186:—
16		142:—	130:—	110:—	122:—	124:—	174:—
18				116:—	128:—	196:—	240:—
20		152:—	146:—	126:—	148:—	148:—	180:—
22				130:—	154:—		
25				130:—	154:—	158:—	226:—
30			362:—*	150:—	154:—	180:—	252:—
35				156:—*	162:—*	210:—	290:—
40				242:—*	218:—*	234:—	346:—
45				480:—*	240:—*	296:—*	
50				545:—	290:—*	525:—*	705:—*
55					940:—*	575:—*	
60					1000:—	760:—	965:—

* OBS! Endast Obeh

FZB = blankförzinkad enl. ISO 4042

Art. nr¹ _ 3 8 1 _ 0 0 _ 1 6 _ _ 2 _ _ _
Art. nr² _ 3 8 1 _ 0 _ _ 2 _ _ 3 _ _ _



MATTSSONS

0371-890 00